



# ATOS 15<sup>M</sup>

A POS with  
a MASSIVE core 16:9



The striking, stylish design of the **ATOS 15 M** is enhanced by a robust metal base and a flat line, 16:9 monitor. This highly stable POS is certain to improve the reliability of your operations.

**Atos 15 M** is an exclusive POS solution.



height 324 mm



length 180 mm




width 390 mm



weight 4960 g

## HARDWARE

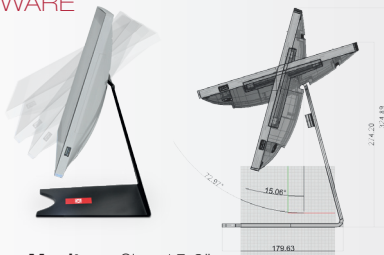

**Monitor** Size: 15,6"  
Resolution: 1366x768

**Touch technology** Resistive / Capacitive

**CPU** ARM Cortex A9 Dual Core @1GHz

**Operating system** Android 4.2.2 or above

**Storage memory** 8GB eMMC

**RAM memory** 1GB

**Interfaces** 3 x USB  
2 x RS-232  
1 x LAN  
1 x RJ-11  
1 x Micro SD slot  
1 x Micro USB

**Audio** Stereo

**Options** Customer Display  
iButton Dallas Reader  
NFC Reader  
Magnetic Stripe Reader (MSR)

**Dimensions and weight** L390 P180 H324 mm - 4960 g

**Power supply** 24v/1,87A

**Temperature** Operating: 10°-40°C  
Storage: 20°-60°C



fiscal printer: **Print! F**



printer: **Print! - Print! S**

High resolution (8 dots/mm) graphic thermal printer, easy paper loading, automatic cutter

**Paper roll:** width: 79.5 mm +/- 0.5 mm; diameter 83 mm

**Printing speed:** 300 mm/sec - 250 mm/sec Print! S

**Printing system:** easy paper loading, automatic cutter

**Automatic cutter:** 1,5 million cuts

**Print Head:** 150 km

**Barcodes supported:** UPC-A/ UPC-E/ JAN13(EAN13)/ JAN8(EAN8)/ CODE39/ ITF/ CODABAR/ CODE93/ CODE128/QRCODE

**Power supply: external. Input:** 100-240 Vac, 50/60 Hz. Output: 24 Vdc, 2.5a, 60W

**Dimension:** W138 x L175 x H120 mm - Weight: 1320 g

### Interfaces

|                                  |                                  |
|----------------------------------|----------------------------------|
| 1 RS 232 serial port             | 1 RS 232 serial port             |
| 1 RJ11 port per cash drawer, 12V | 1 RJ11 port per cash drawer, 12V |
| 1 USB                            | 1 USB Device                     |
| 1 Ethernet                       | 1 Ethernet                       |
| 1 RJ45 for external display      |                                  |

### Communication protocol:

RCH protocol  
Xon-Xoff protocol  
UPOS standard protocol  
JAVAPOS protocol  
Compatible with EPSON ESC/POS and STAR command sets

Compatible with EPSON ESC/POS and STAR command sets

**Electronic Journal:** electronic journal on RCH multimedia card

**Languages:** PAN European languages (ENG, SPA, FRE, DEU ...); Asiatic Languages: Chinese, Japanese, Korean

**SW Driver:** Windows X86 / X64 / Linux / OPOS driver



## THE SOLUTION INCLUDES




Point of Sale



printer



software Atos

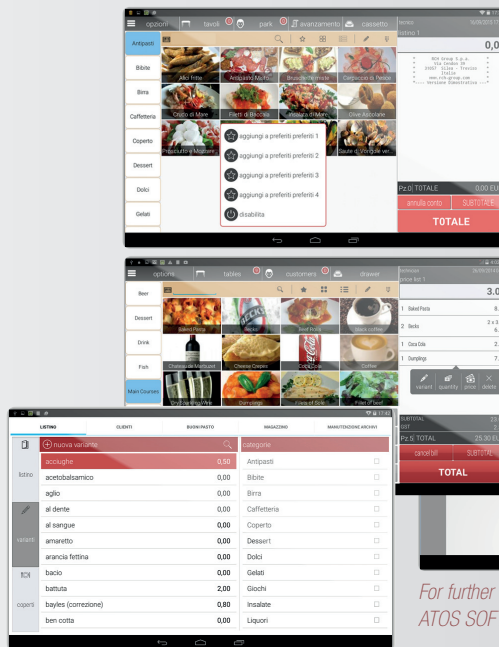

The ATOS software manages your store thanks to:

**Point of Sale Front End**  
**Orders Management**  
**Clients Management**  
**Reports Management**  
**Settings Management**

For further information please refer to the ATOS SOFTWARE leaflet

## ACCESSORIES

• **Print! 80mm thermal printer** »  
for kitchen tickets and invoices, with serial RS232 or USB connector

• **Waiter's module for ordering** »  
It's a solution that simplifies the work of waiters in handling orders from the table.

• **Customer Display** »  
2-line x 20-character alphanumeric

• **i-Button** »  
• **Magnetic card reader**  
• **Scanner:** USB barcode reader  
• **USB pen** for backup and upgrade purpose  
• **SD Card** for backup

## OPERATING SYSTEM



## INTERFACES



## OPTION

